

Technical Data Sheet

CODE 65158

AIR DOOR H AD1500 T

Air curtains




Certifications



Technical and performance data

Frequency (Hz)	50	Airflow at 1st speed (m ³ /h)	1900
Max absorbed current (A)	18	Max airflow at Max speed (l/s)	611
Max absorbed power at Max speed (W)	10650	Max airflow at Max speed (m ³ /h)	2200
Max ambient temperature for continuous operation (°C)	45	Max flow speed (m/s)	9.5
Motor class	E	Min flow speed (m/s)	8.5
Number of speeds	2	Power setting 1 (W)	3300
Voltage (V)	400	Power setting 2 (W)	6700
Weight (Kg)	18	Power setting 3 (W)	10000
Airflow at 1st speed (l/s)	528	Sound pressure at 2m at Max speed Lp [dB (A)]	59
		Sound pressure at 2m at Min speed Lp [dB (A)]	57

Dimensions

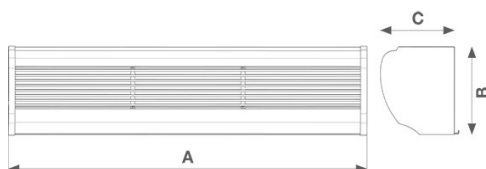

Size A (mm)	1500
Size B (mm)	260
Size C (mm)	190

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com

Technical Data Sheet

CODE 65158

AIR DOOR H AD1500 T

Air curtains



Description

- Aluminium front panel with satin finish, colour silver, and air inlet grille comprising 9 horizontal sections of polished aluminium. Rear pressed steel casing, colour black, functions as a frame to which all internal components are fixed. End caps moulded in ABS thermoplastic resin, colour black.
- Nominal width of appliance: 1500 mm.
- Twin-shaft induction motor with thermal overload protection, 2 speeds.
- Minimum air flow: 1900 m³/h
- Maximum air flow: 2200 m³/h
- 2 tangential fans moulded in thermoplastic resin (SAN) and ultrasonically welded, colour black, force air through a longitudinal

vent located in the underside of the appliance.

- Electric battery with thermistors (PTC) featuring high thermal yields and reduced aerodynamic drag, protected against overtemperatures and power surges.
- Fun shutdown system by 30" after switching off the heating element.
- Infrared remote control for switching on/off, selecting the desired operating speed and switching on the heating element. These same controls are also available on the front panel of the appliance (3 buttons).
- Adjustable flaps for orientation of air stream.

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com