



ARIETT RANGE

Centrifugal duct fans

*For the ventilation of areas with intermittent use
(small bathrooms, private or public toilets).*



- **2 models.**
- Motor with shielded poles and ball bearings (guaranteed for 30,000 fault-free hours of operation) and thermal overload protection.
- The timer is adjustable from 3 to 20 min.
- Protection rating: IPX4.
- Insulation class: II. □

Wiring diagrams shown from page 458

Design: F. Trabucco - M. Vecchi




TECHNICAL DATA

Models	Code		V~50Hz	W	A	RPM	Max Airflow		Max Pressure		Lp dB(A)* 3m	Max °C
	BASIC	TIMER					m³/h	l/s	mmH₂O	Pa		
ARIETT LL	11965	11966	230	18	0.14	2315	70	19.4	12	118	40	40

* Conforms with ISO 3744 for noise and pressure levels.

DIMENSIONS

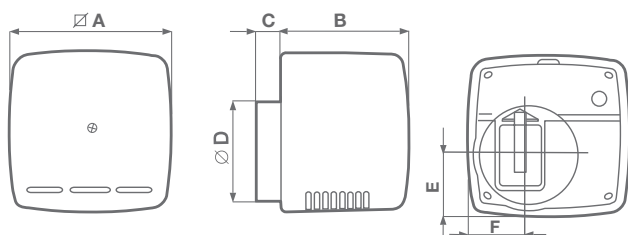


Models	A	B	C	Ø D	E	F	Kg
ARIETT LL	156	123	25	97	60	60	1.5
ARIETT LL T							

Dimensions (mm)



PRODUCT ACCESSORIES


Models		Code	Product	
			ARIETT LL code 11965	ARIETT LL T code 11966
	C 1.5 Electronic speed controller 1.5 A	12966	●	-
	SCNRB Built-in non-reversible electronic speed controller	12971	●	-
	SCB KIT Built-in controller adaptor for C 1.5	22481	12966	-
	M 10/4 Air deflector	22310	●	●

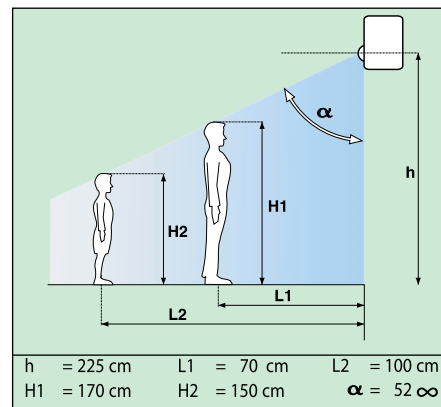

Activation range of PIR detector.

Description and sizes on page 126; System components on page 330.

PERFORMANCE CURVES

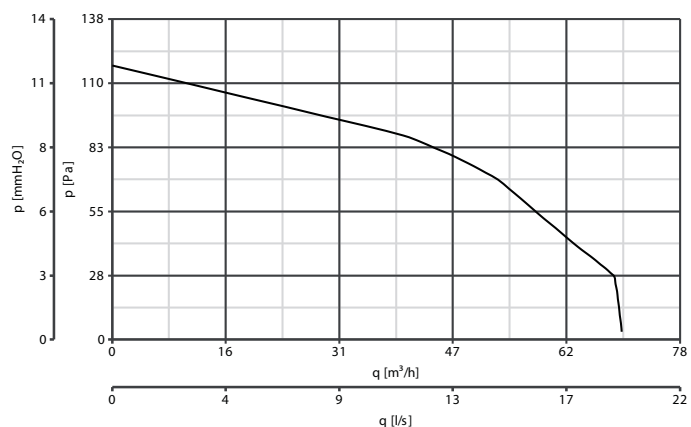ARIETT LL code 11965
ARIETT LL T code 11966

delivery