




CKM



Caratteristiche: i ventilatori in linea da canale CKM sono progettati e costruiti per un inserimento rapido e sicuro nei tratti di condotto rettangolare. I ventilatori sono provvisti di girante in acciaio zincato a semplice aspirazione con motore elettrico direttamente accoppiato raffreddato dal fluido convogliato. Le ventole sono alloggiare in una cassa in acciaio zincato provvista di flange per il fissaggio ai condotti. Il gruppo ventilante è montato su di una portello a battente in grado di assicurare una manutenzione rapida e la completa sanificabilità del ventilatore.

Characteristics: in-line duct fans CKM are designed and built for rapid and secure installation in rectangular ducts. The fans are equipped with centrifugal impeller in galvanized steel directly coupled to an electric motor that is cooled by the air flow. The fans are housed in a box made of galvanized steel with flange for fixing to the ducts. The motorized impeller is mounted on a hinged door that ensures easy maintenance and complete sanitization of the fan.

DISEGNI | DRAWINGS

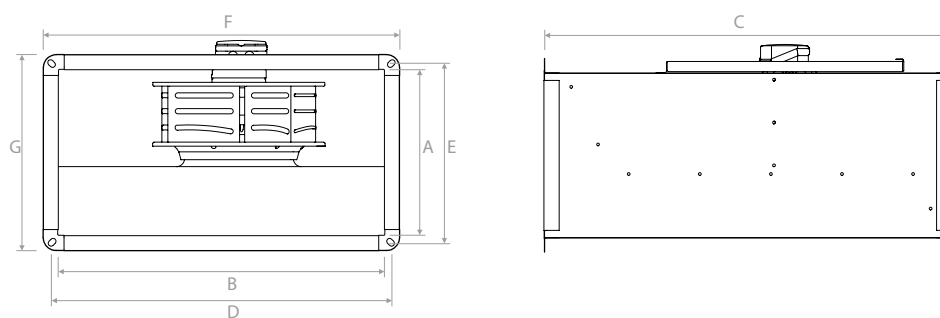

Modello Model	A	B	C	D	E	F	G
	mm	mm	mm	mm	mm	mm	mm
CKM 30-15	150	300	400	320	170	350	200
CKM 40-20 A	200	400	500	420	220	450	250
CKM 40-20 B	200	400	500	420	220	450	250
CKM 50-25	250	500	565	520	270	550	300
CKM 60-30	300	600	750	620	320	660	360
CKM 60-35 A	350	600	750	620	370	660	410
CKM 60-35 B	350	600	750	620	370	660	410
CKM 70-40 A	400	700	800	720	420	770	470
CKM 70-40 B	400	700	800	720	420	770	470
CKM 80-50	500	800	920	820	520	870	570
CKM 100-50	500	1000	1050	1030	530	1070	570

TABELLA PRESTAZIONI | PERFORMANCE TABLE

