



NORDIK® INTERNATIONAL PLUS RANGE


Ceiling fans

Ideal for use in bedrooms, living rooms, shops, stores and other public places.

- 5 models: **NORDIK® INTERNATIONAL PLUS 90/36"**, **NORDIK® INTERNATIONAL PLUS 120/48"**, **NORDIK® INTERNATIONAL PLUS 140/56"**, **NORDIK® INTERNATIONAL PLUS 140/56" IPX5**, **NORDIK® INTERNATIONAL PLUS 160/60"** in white colour.
- Metal parts coated with scratchproof polyester powder.
- Induction motor with external rotor for greater power at slow speeds.
- Also suitable for night time operation due to strong coated steel laminate blades with a shape designed to guarantee quiet performance.
- **IPX5 model:** Fully protected against water splashes. Even directing a jet of water on to the casing from any direction does not cause any damage.
- Provided with 37.5 cm ceiling rods.
- Insulation class: I. Ⓛ
- Comply with the requirements of Regulation N° 206/2012/EU set out by the EUP/ErP Directive, effective starting from 01.01.2013.



Design: F. Trabucco & Ass.



Wiring diagrams shown from page 458

TECHNICAL DATA


Models	Code	Colour	V ~ 50 Hz	W	A	RPM	N° Blade	Max Airflow m³/h	
NORDIK INTERNATIONAL PLUS 90/36"	61701	White	220-240	70	0.32	228	3	8550	
NORDIK INTERNATIONAL PLUS 120/48"	61711				0.33	234		9900	
NORDIK INTERNATIONAL PLUS 140/56"	61721					231		13500	
NORDIK INTENATIONAL PLUS 140/56" IPX5	61742					201		14000	
NORDIK INTERNATIONAL PLUS 160/60"	61731								

Models	Symbol	Unit	NORDIK INTERNATIONAL PLUS 90/36"	NORDIK INTERNATIONAL PLUS 120/48"	NORDIK INTERNATIONAL PLUS 140/56"	NORDIK INTERNATIONAL PLUS 140/56" IPX5	NORDIK INTERNATIONAL PLUS 160/60"
Code			61701	61711	61721	61742	61731
Maximum fan flow rate	F	m³/min	142.50	165.00	225.00	225	233.33
Fan power input	P	W	70				
Service value	SV	(m³/min) W	2.036	2.357	3.214	3.214	3.333
Fan sound power level	LWA	dB(A)	46.1	49.1	52.6	52.1	55.5
Maximum air velocity	C	m/sec	2.47	1.68	1.69	1.69	1.54
Measurement standard for service value	IEC 60879; EN 62301: UNI EN ISO 3741						

For more information refer to: Vortice Elettrosociali spa, Strada Cerca, 2 - 20067 Zoate di Tribiano (MI)



DIMENSIONS

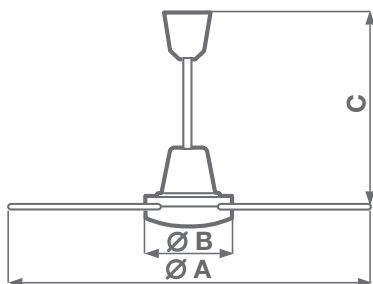

Modelos	Ø A	Ø B	C	Kg
NORDIK INTENATIONAL PLUS 90/36"	914	230	495	5.5
NORDIK INTENATIONAL PLUS 120/48"	1218			5.9
NORDIK INTENATIONAL PLUS 140/56"	1422			6.2
NORDIK INTENATIONAL PLUS 140/56" IPX5				
NORDIK INTENATIONAL PLUS 160/60"	1524			6.7

Dimensions (mm)

PRODUCT ACCESSORIES

Models	Description	Code	Product				
			NORDIK INTERNATIONAL PLUS 90/36" code 61701	NORDIK INTERNATIONAL PLUS 120/48" code 61711	NORDIK INTERNATIONAL PLUS 140/56" code 61721	NORDIK INTERNATIONAL PLUS 160/60" IPX5 code 61742	NORDIK INTERNATIONAL PLUS 160/60" code 61731
	KIT SCBRR5/5L/M Built-in controller adaptor for C 2.5	22489	•	•	•	•	•
	SC 503 B (white) Face plate	22462	•	•	•	•	•
	SC 503 N (antracite grey) Face plate	22463	•	•	•	•	•
	SC 503 B (white) Flush mounted speed controller	12801	•	•	•	•	•
	SC 503 N (antracite grey) Flush mounted speed controller	12802	•	•	•	•	•
	SC EXT B (white) Wall mounted speed controller	12803	•	•	•	•	•
	SCRR/M	12965	•	•	•	•	•
	SCRR5	12963	•	•	•	•	•
	Ceilings rods NK 200 mm (white)	22032	•	•	•	•	•
	Ceilings rods NK 275 mm (white)	22032	•	•	•	•	•
	Ceilings rods NK 350 mm (white)	22042	•	•	•	•	•
	Ceilings rods NK 500 mm (white)	22051	•	•	•	•	•
	Ceilings rods NK 750 mm (white)	22074	•	•	•	•	•
	Ceilings rods NK 1000 mm (white)	22077	•	•	•	•	•

Description and sizes on page 401