



HCBB/HCBT

5603999400 - HCBB/4-450/H-A (230V50HZ) V5 - VENTILATOARE PENTRU PERETE



Ventilator axial de perete cu elice de aluminiu si motor monofazic - IP65 - Clasa F cu protector termic incorporat, cu cutie de borne continând condensatorul, marca S&P modelul HCBB/4-450/H-A (230V50HZ) V5 pentru un debit 5.770 m³/h si presiune statica 100 Pa.

Punct de functionare teoretic

Debit	5.770 m³/h
Presiune statica	100 Pa
Temperatura	20 °C
Altitudine	0 m
Densitate	1,2 kg/m³
Frecventa	50 Hz

Punct de functionare

Debit de aer	5.770 m³/h
Presiune statica	100 Pa
Presiune dinamica	61 Pa
Presiune totala	161 Pa
Puterea consumata	0,614 kW
Viteza pe refulare	10,1 m/s
Turatie ventilator	1394 rpm
Specific Fan Power	0,38 W/l/s


Constructie

Diametru	450 mm
Fan size	450
Pale	7
Greutate	13,00 kg

Caracteristici motor


Numar de poli	4
Tensiune	1-230V-50Hz
Current maxim absorbit	2,8 A
Clasa IP	IP65
Clasa izolatie motor	F

Desen

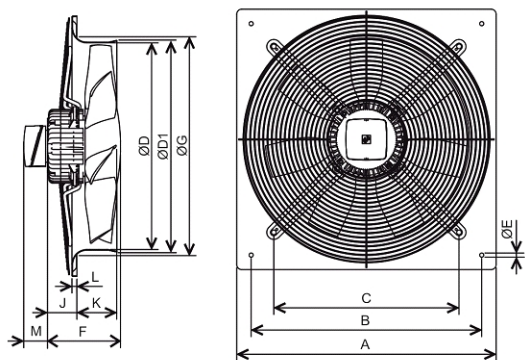

A	B	C	D	D1	E	F	G	J	K	L	M
560	480	400	450	457	10	150	476	48	91	12	65

Grafic performante

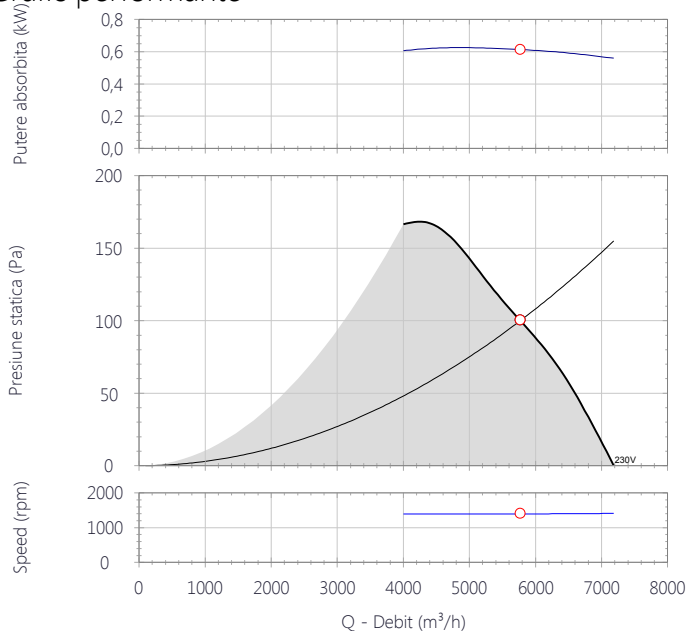

Performante sonore

	63	125	250	500	1k	2k	4k	8k	Overall
Aspiratie (LwA)	47	66	62	69	76	74	69	62	80
Aspiratie LpA @ 1,5m	32	51	48	54	61	60	55	48	65

